


2-Pce Male x Female Full Bore Ball Valve lever operated

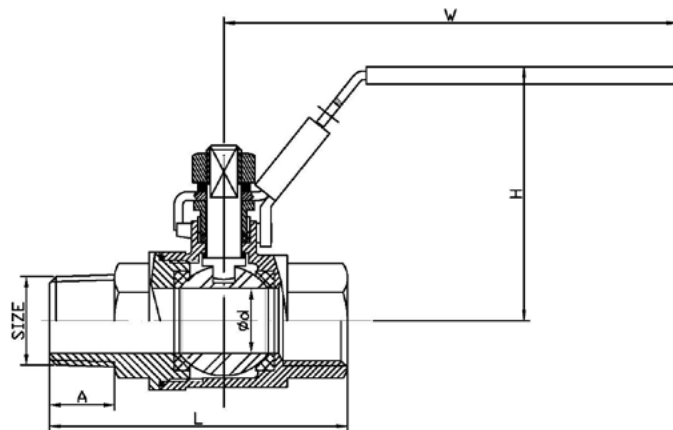

ASTM A351 CF8M 316 Stainless Steel Body, 316 Trim, PTFE Ball Seats and Seals. Locking Lever. Full Bore. 1000 PSI rated. BSPT Male End to ISO 7/1 R and BSPP Female End to ISO 7/1 Rp. -25/+180°C Temp rated.

Design Standard - ASME B16.34

Wall Thickness - ASME B16.34

Inspection and Testing - API 598

Item	Part	Material	Qty.
1	Handle Cover	PLASTIC	1
2	Body	CF8M	1
3	Ball Seat	PTFE	2
4	Ball	CF8M	1
5	Cap	CF8M	1
6	Thrust Washer	PTFE	1
7	Stem Packing	PTFE	1
8	Gland Nut	304	1
9	Spring Washer	304	1
10	Stem Nut	304	1
11	Stem	316	1
12	Locking Device	304	1
13	Handle	304	1

Size	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Length (mm)	62	64	69	80.5	95	107	120	142
Weight (kg)	0.21	0.24	0.29	0.41	0.71	1.10	1.60	2.61

