

3-Pce Screwed Full Bore Ball Valve lever operated




ASTM A351 CF8M 316 Stainless Steel Body & Ends, 316 Trim, PTFE Ball Seats and Seals. Full Bore. Locking Lever. 1000 PSI rated sizes 1/4" – 2", 600 PSI rated sizes 2-1/2" – 4". BSPP Ends to ISO 7/1 Rp. NPT Ends to ASME B1.20.1. -25/+180°C Temp rated.


Design Standard - ASME B16.34

Wall Thickness - ASME B16.34

Inspection and Testing - API 598

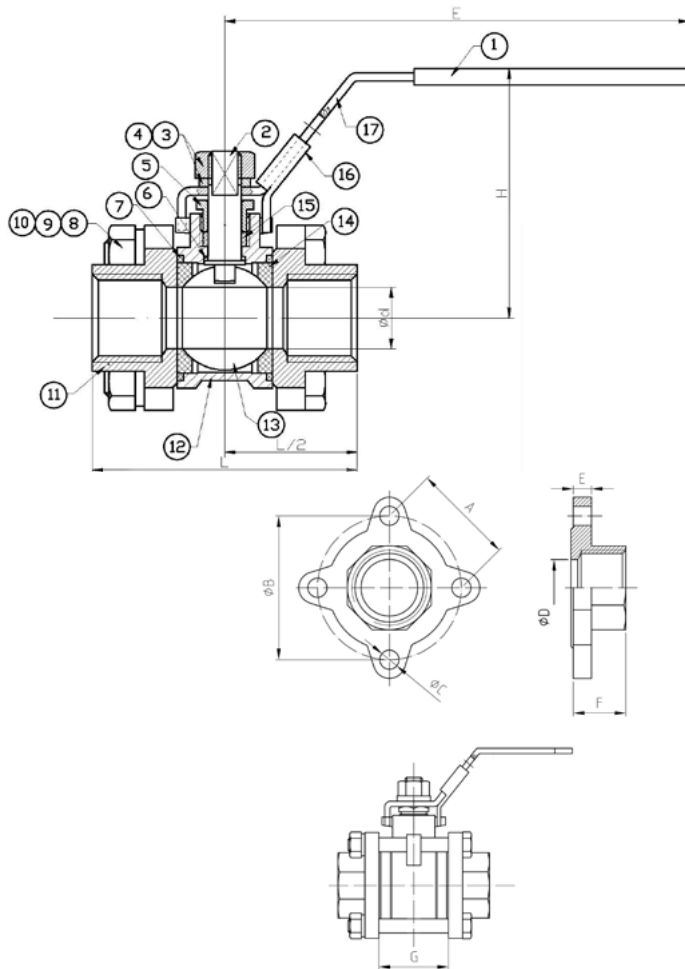

Pressure-Temp. Rating

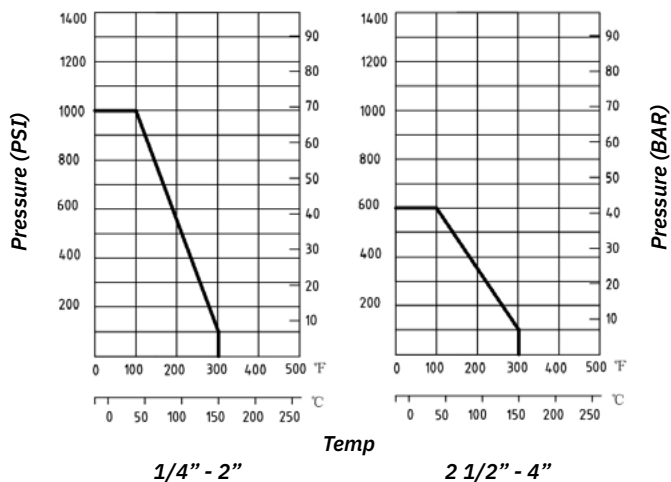

Size	1/4"	3/8"	1/2"	3/4"	1"
Length (mm)	59	60	65.5	76.5	86.2
Weight (kg)	0.31	0.34	0.51	0.73	1.12

1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
103.1	118	131.5	162.6	182.7	217.7
1.64	2.81	4.28	7.65	11.90	26.50

Item	Part	Material	Qty.
1	Handle Cover	PLASTIC	1
2	Stem	316	1
3	Hand Washer	304	1
4	Hand Nut	304	1
5	Gland	304	1
6	Thrust Washer	PTFE	1
7	End Seal	PTFE	2
8	Bolt	304	4
9	Bolt Nut	304	4
10	Bolt Washer	304	4
11	End Cap	CF8M	2
12	Body	CF8M	1
13	Ball	CF8M	1
14	Ball Seat	PTFE	2
15	Stem Packing	PTFE	1
16	Locking Device	304	1
17	Handle	304	1