


1-Pce Reduced Bore Male x Female Ball Valve

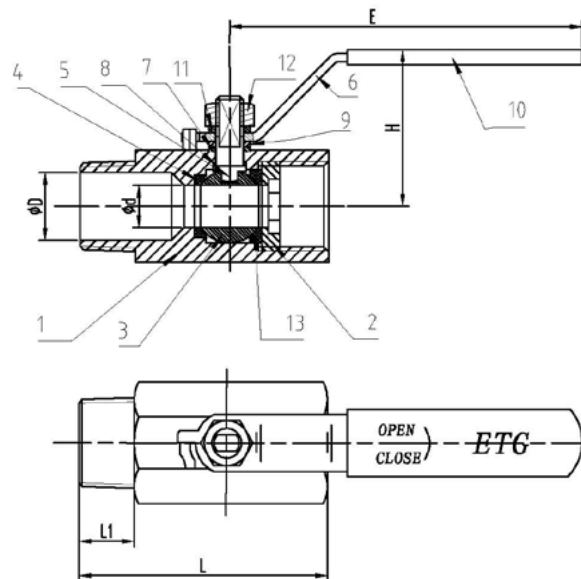

ASTM A351 CF8M 316 Stainless Steel Body, 316 Trim, PTFE Ball Seats and Seals. Lever Operation (without Locking Device). Reduced Bore. 1000 PSI rated. BSPT Male End to ISO 7/1 R and BSPP Female End to ISO 7/1 Rp. NPT Male x Female Ends to ASME B1.20.1 -25/+180°C Temp rated.

Design Standard - ASME B16.34

Wall Thickness - ASME B16.34

Inspection and Testing - API 598

Item	Part	Material	Qty.
1	Body	316	1
2	Body Insert	316	1
3	Ball	316	1
4	Seat	PTFE	1
5	Stem	316	2
6	Handle	304	1
7	Stem Packing	PTFE	1
8	Thrust Washer	PTFE	1
9	Gland Ring	304	1
10	Handle Cover	PLASTIC	1
11	Stem Washer	304	1
12	Stem Nut	304	1
13	Joint Gasket	PTFE	1

Size	1/4" x 1/4"	3/8" x 3/8"	1/2" x 1/2"
Length (mm)	46	50.5	60.5
Weight (kg)	0.07	0.12	0.17

Size	1/4" x 1/4"	1/4" x 1/2"
Length (mm)	46	60.5
Weight (kg)	0.07	0.17

